



DC08-40

Pilot Operated Check Valve, 207 BAR Rated

A dual pilot operated check valve for use in blocking or load-holding circuits.

Porting	Hydraforce code	Article no.	Bias Spring Options	Price £	Price €
Cartridge Version	DC08-40-0-N*	DC08400C*		£63.70	€76.40
INLINE 1/4" BSP	DC08-40-2B-N*	DC08402B*	* suffix with 25 = 1.72 BAR (25 PSI) 135 = 9.3 BAR (135 PSI)	£105.40	€126.50
INLINE 3/8" BSP	DC08-40-3B-N*	DC08403B*		£105.40	€126.50

with nitril seals / Viton on request

Materials


Cartridge:

Weight: 0.13 kg. (0.28 lbs.)
Steel with hardened work surfaces.
Zinc-plated exposed surfaces.
Buna N O-rings and polyester elastomer back-ups standard.

Standard Ported Body:


Weight: 0.18 kg. (0.40 lbs.)
Anodized highstrength 6061 T6 aluminum alloy, rated to 207 bar (3000 psi).
Ductile iron bodies available; dimensions may differ.

Dimensions

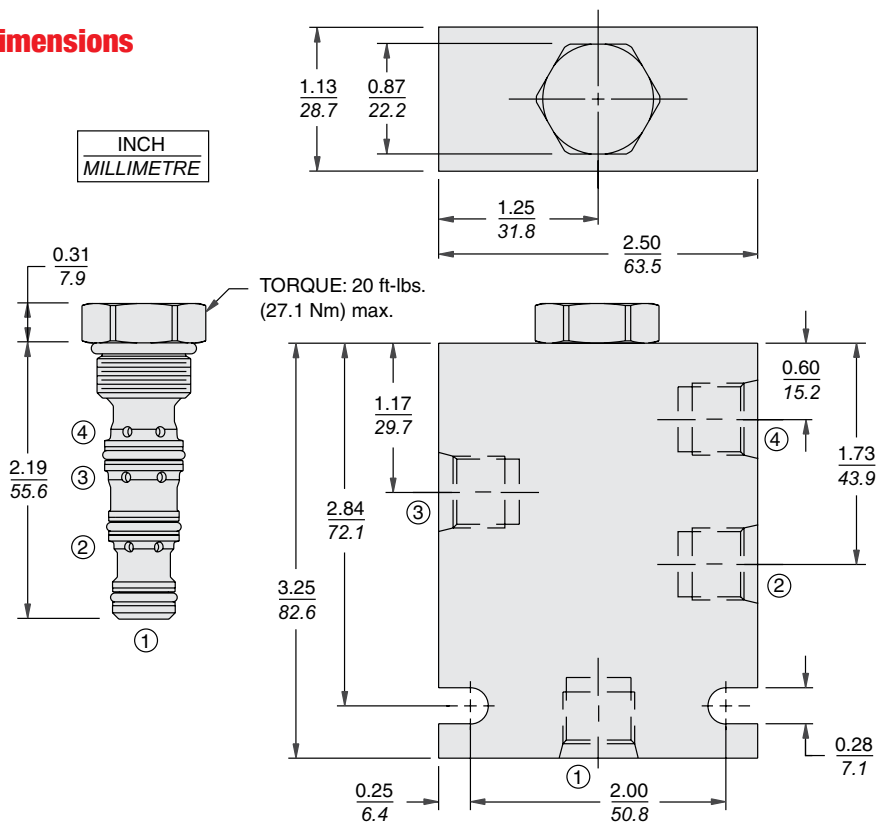


Symbols

USASI:



ISO:



Performance

