

MP08-20

Manual, Spring Return, Pull-to-Open, 207 BAR Rated

A manual, 2-way, pull-to-open, screw-in hydraulic directional valve.

Porting	Hydraforce code	Article no.	Price £	Price €
Cartridge Version	MP08-20T-0-N25	MP0820T0C25	£44.00	€52.70
INLINE 1/4" BSP	MP08-20T-2B-N25	MP0820T2B25	£69.30	€83.20
INLINE 3/8" BSP	MP08-20T-3B-N25	MP0820T3B25	£69.30	€83.20

with nitril seals / Viton on request
STANDARD WITH THREADED SHAFT 'T'
 Options for black 'K' Or red 'J' plastic knobs

Materials

Cartridge:


Weight: 0.10 kg. (0.22 lbs.)
 Steel with hardened work surfaces.
 Zinc-plated exposed surfaces.
 Buna N O-rings and back-ups standard. Plastic knob optional.

Standard Ported Body:


Weight: 0.16 kg. (0.35 lbs.)
 Anodized highstrength
 6061 T6 aluminum alloy,
 rated to 207 bar (3000 psi).
 Ductile iron bodies available;
 dimensions may differ.

Symbols

USASI/ISO:



Performance

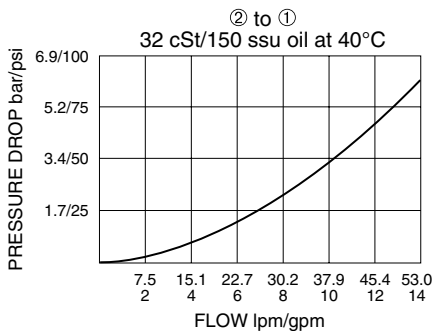

Dimensions

