

## EC10-32

### Pressure Compensator, 207 BAR Rated

A screw-in, cartridge-style, load sense, flow-on-demand pressure-compensator.

Porting	Hydraforce code	Article no.	Spring Options	Price £	Price €
Cartridge Version	EC10-32-0-N-*	<b>EC10320C*</b>		<b>£50.60</b>	<b>€60.80</b>
INLINE 1/4" BSP	EC10-32-2B-N*	<b>EC10322B*</b>	* suffix with 80 = 5.52 BAR (80 PSI) 150 = 10.3 BAR (150 PSI)	<b>£87.90</b>	<b>€105.40</b>
INLINE 3/8" BSP	EC10-32-3B-N*	<b>EC10323B*</b>		<b>£87.90</b>	<b>€105.40</b>

with nitril seals / Viton on request

### Materials


#### Cartridge:

Weight: 0.11 kg. (0.25 lbs.)  
Steel with hardened work surfaces.  
Zinc-plated exposed surfaces.  
Buna N O-rings and polyester elastomer back-ups standard.

#### Standard Ported Body:


Weight: 0.36 kg. (0.80 lbs.)  
Anodized highstrength 6061 T6 aluminum alloy, rated to 207 bar (3000 psi).  
Ductile iron bodies available; dimensions may differ.

### Dimensions

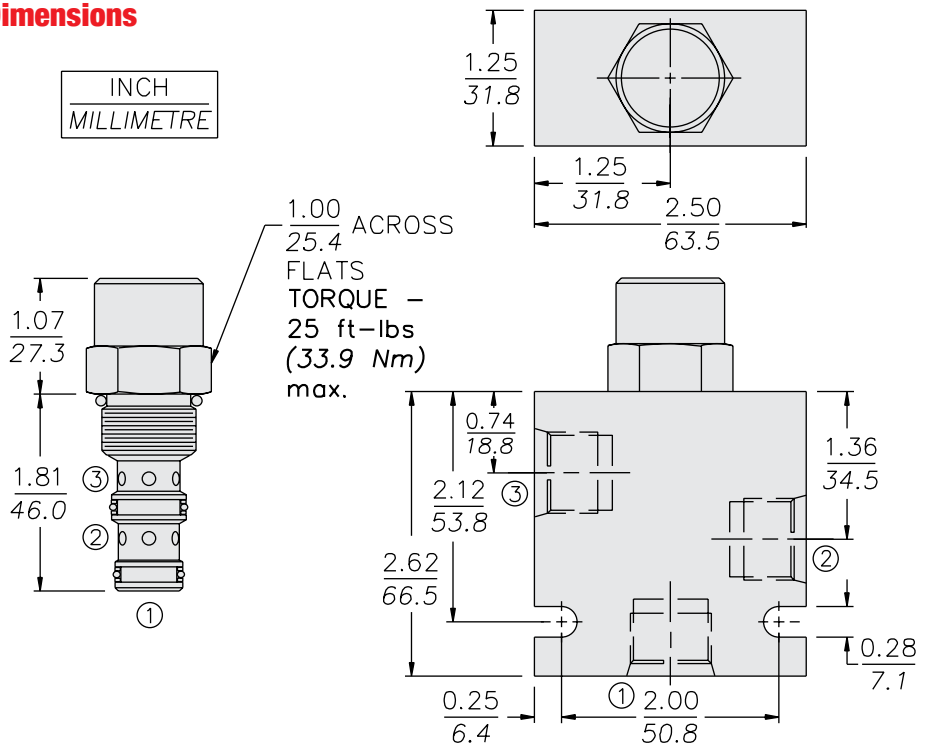

### Symbols

#### USASI/ISO:



### Performance

Flow Maintenance Characteristic  
150 psi Spring  
32 cSt/150 ssu oil at 40°C

