

G90 Swivel Adaptors

250 – 400 BAR Rated

The series G90 swivel adaptors are designed to be mounted between a hose and a rigid component to allow and compensate occasional rotations, preventing hose damage.

Technical Features And Options

- Working temperatures with standard seals: -20°C/ +110°C
- For AISI consider half of maximum static and rotation pressure.




WARNING!

- G90 series is not suitable for continuous or fast rotations.

Materials

Construction material:	Carbon steel.
Standard seals:	Nitrile rubber
Standard thread:	BSP (GAS)
Special materials on request:	AISI 303, AISI 316, Brass
Special seals on request:	Viton, EPDM, Silicone
Special thread on request:	NPTF, Metric, UNF

QUICK CONNECT COUPLINGS

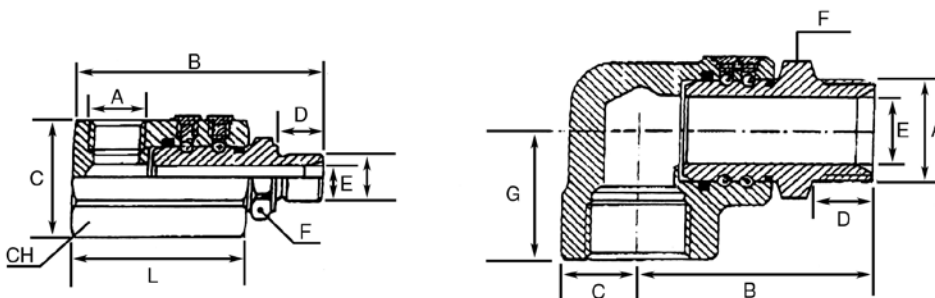

Dimensions (mm)

A	B	C	D	E	F	G	CH	Max pressure in rotation BAR	Static max pressure BAR	Article no.	Price £	Price €
1/4"	69	30.5	11	6,5	ES19	58	ES30	200	400	820500000	£19.10	€20.00
3/8"	78	41.5	14	9,0	ES24	63	ES36	200	400	820500001	£21.70	€22.80
1/2"	86	44	15	12,0	ES27	68.5	ES38	150	300	820500002	£25.90	€27.20
3/4"	99	58	19	16,0	ES34	79	ES50	150	300	820500003	£44.90	€47.10
1"	113	ø60.0	21	20,0	ES41	90	Ø60	100	300	820500004	£62.30	€65.40
1 1/4"	92	ø31.5	24	28,0	ES50	56.5		100	300	820500005	£114.40	€120.10
1 1/2"	104	38	25	34,0	ES55	62		80	300	820500006	£160.10	€168.10
2"	111	45	27	44,0	ES65	67		50	250	820500007	£214.90	€225.70