


# Flow Divider/Combiner Valves - DRF

**250 BAR Rated**

## Technical data

Mineral oil	ISO 6743/4 / DIN 51524
Fluid viscosity	10-500 mm <sup>2</sup> /s / 6 to 420 cSt
Max contamination index with filter	ISO 4406:1999 / Classe 19/17/14
Fluid temperature	-20°C +80°C
Ambient temperature	-20°C +50°C

It is necessary a filter use to protect the valve (advised filtration 15 micron)



HYDRAULIC VALVES

Code	Max Flow l/min	Max pressure bar (PSI)	Weight kg
DRF10	40	250 (3625)	0.55


## Ordering code

Article no.	Price £	Price €
DRF10	£167.00	€175.40

## DRF10 - X - Y - K

X	Inlet Flow Range	Y	Port P	K	Port U1/U2
1	2-5 l/min	380	1-2-3	380	1-2-3
2	3-10 l/min	120	4	120	4
3	7-20 l/min				
4	15-40 l/min				

## Dimensions (mm)

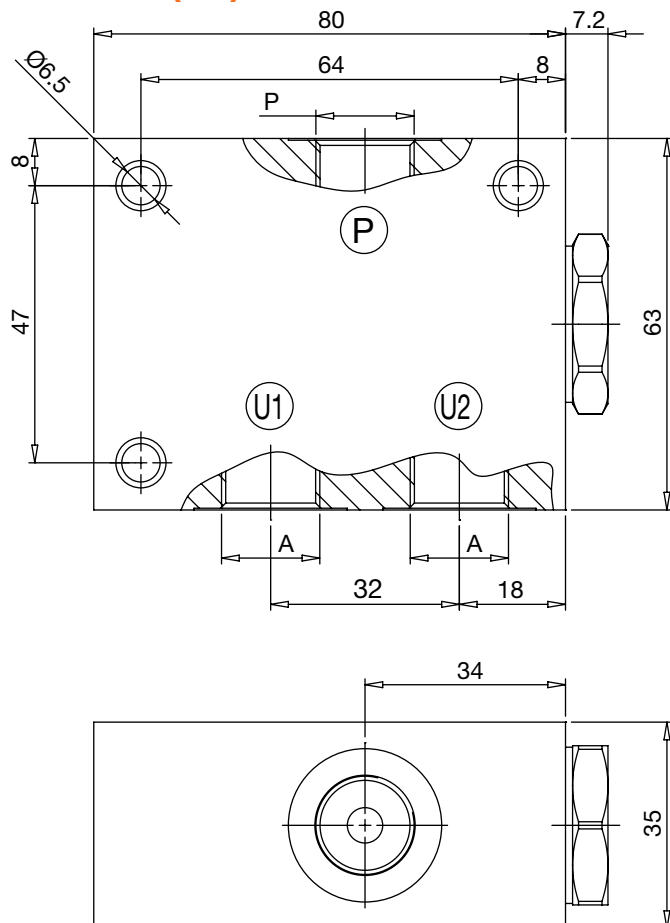

## Pressure Drop Graphs

