



WARNING!

- GD series is not suitable for continuous or fast rotations.

Inline Swivel Adaptors

250 – 400 BAR Rated


The series GD swivel adaptors are designed to be mounted between a hose and a rigid component in order to allow and compensate occasional rotations, preventing hose damage.

Technical Features And Options

- Others threads available on request
- Working temperatures with standard seals: -20°C/ +110°C
- For AISI consider half of maximum static and rotation pressure

Materials

Construction material: Carbon steel.
 Standard seals: nitrile rubber
 Standard thread: BSP (GAS)
 Special materials on request: AISI 303, AISI 316, Brass
 Special seals on request: Viton, EPDM, Silicone
 Special thread on request: NPTF, Metric, UNF

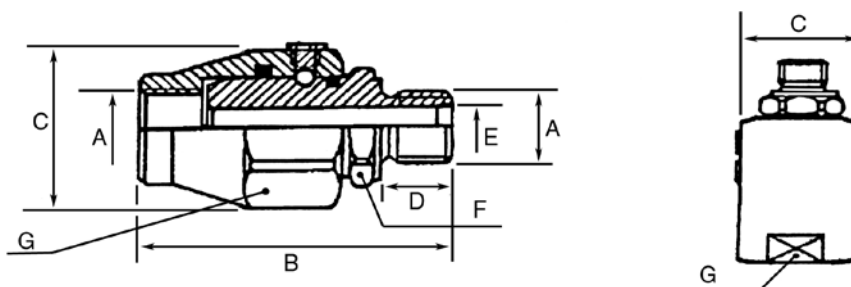

Dimensions (mm)

A	B	C	D	E	F	G	Max pressure in rotation BAR	Static max pressure BAR
1/4"	61	33	11	6,5	ES19	ES30	200	400
3/8"	66	37	14	9,0	ES24	ES34	200	400
1/2"	70	42	15	12,0	ES27	ES36	150	300
3/4"	79	50	19	16,0	ES34	ES45	150	300
1"	90	Ø 55	21	20,0	ES41	CH50	100	300
1 1/4"	101	Ø 60	24	28,0	ES50	CH55	100	300
1 1/2"	110	Ø 70	25	34,0	ES55	CH65	80	300
2"	118	Ø 85	27	44,0	ES65	CH75	50	250

Article no.	Price £	Price €
820400000	£17.80	€18.40
820400001	£19.50	€20.10
820400002	£22.80	€23.50
820400003	£36.30	€37.40
820400004	£50.80	€52.40
820400005	£77.30	€79.70
820400006	£117.60	€121.30
820400007	£176.20	€181.70