

CETOP5 Pilot Operated Check Valves


For "A" Line: MPA-03--20**
For "B" Line: MPB-03--20**
For "A&B" Line: MPW-03--20**

Specifications





Model Numbers	Cracking Pressure MPa (PSI)	Max. Op Pressure MPa (PSI)	Max. Flow L/min	Weight
MPA-03-**-20		25 (3630)	70	3.5kg
MPB-03-**-20	2 = 0.2 (29) 4 = 0.4 (58)	25 (3630)	70	3.5kg
MPW-03-**-20		25 (3630)	70	3.5kg

Typical Performance Characteristics

Hydraulic Fluid: Viscosity 35 mm²/s (164 SSU), Specific Gravity 0.850



Model No.	Graphic Symbols	Detailed Graphic Symbols
MPA-03		
MPB-03		
MPW-03		

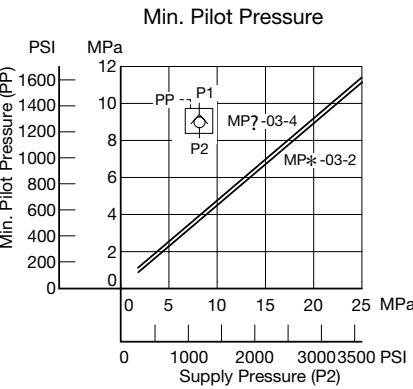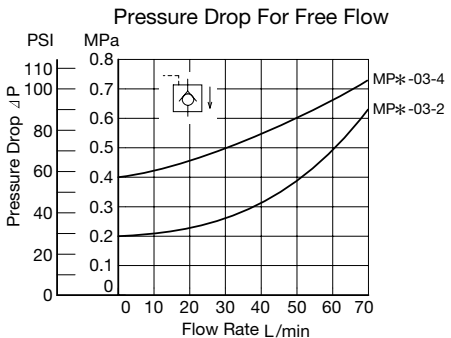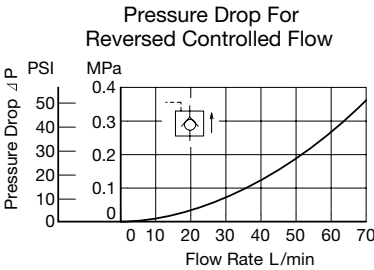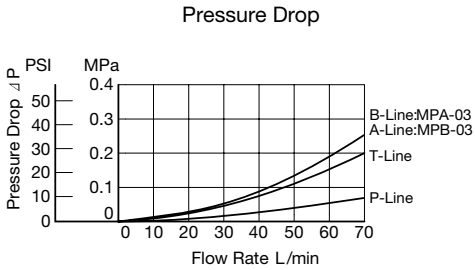

Model Number Designation

MPA	-03	-2	-20	*
Series Number	Valve Size	Cracking Pressure MPa (PSI)	Design Number	Design Standard
MPA: Pilot Operated Check Valve for A-Line	03		20	
MPB: Pilot Operated Check Valve for B-Line	03	2: 0.2 (29) 4: 0.4 (58)	20	Refer to ★
MPW: Pilot Operated Check Valve for A&B-Line	03		20	

★ Design Standards: None ... Japanese Standard "JIS" and European Design Standard
 90 ... N. American Design Standard

Special seals - On Request