





The pump is supplied with shaped seal, fixing screws and acting lever 23 in. long

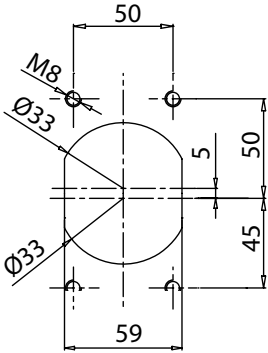

PME580 - Two Speed Hand Pump with Single Acting Cylinder

Article no.	Max Pressure	Max Pressure	Displacement	Displacement	Approx Weight Kg	Price £	Price €
	1 stage BAR	2 stage BAR	1 stage cm ³	2 stage cm ³			
PME580	20	500	80	5	7.1	£337.90	€348.50

Ordering Code

PME580 - X

X	Optional
P	With rubber protection
18	With arrangement for gauge
X18	With relief valve and arrangement for gauge
CA	With automatic device
CA18	With automatic device and arrangement for gauge
CARV	With automatic device and relief valve
CARV18	With automatic device, relief valve and arrangement for gauge


Technical Data

Mineral oil	ISO 6743/4 DIN 51524
Fluid viscosity	10-500 mm ² /s 45 to 2000 ssu (6 to 420 cSt)
Max contamination index with filter	ISO 4406:1999
Fluid temperature	-20°C +80°C
Ambient temperature	-20°C +50°C

It is necessary a filter use to protect the valve (advised filtration 15 micron)

Operating Graph

Effort operating on the end of the lever

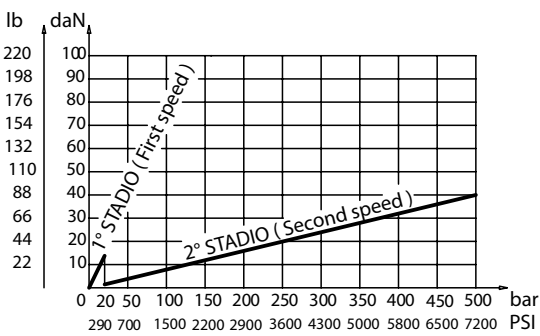

Dimensions (mm)

