



Vented Brass Ball Valves

14 BAR Rated


Temp -10°C to 100°C

BSP Parallel ISO 228

Silicon Free

Article no.	Size	Max Pressure BAR	Price £	Price €
946140	1/4"	14	£11.00	€11.60
946141	3/8"	14	£11.00	€11.60
946142	1/2"	14	£12.40	€13.00
946143	3/4"	14	£16.60	€17.40
946144	1"	14	£26.20	€27.50
946145	1 1/4"	14	£66.30	€69.60
946146	1 1/2"	14	£89.10	€93.50
946147	2"	14	£134.70	€141.40

Padlock	Price £	Price €
PAD2	£11.30	€14.10

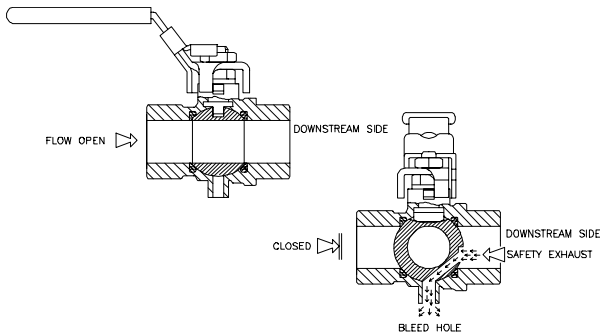

Featuring patented tamper-proof lockable handle that has no equal in the market. S.93 RuB range exhausts automatically and continuously downstream air pressure as soon as turned in the closed position. Valve is lockable in the closed position only, according to Par. 1910.147 safety OSHA (USA) requirements allowing safe maintenance of the air-supplied equipment; when valve is open one simple 90° turn of the handle shuts flow immediately.

Materials

Description	Material
1 Nickel plated body	CW617N RUB001
2 Ball seat	PTFE carbon filled 5-15 RUB008
3 Chrome plated ball	CW617N RUB001
4 Nickel plated end cap	CW617N RUB001
5 Nickel plated stem packing gland design	CW614N RUB001
6 Nickel plated packing nut	CW614N RUB001
7 Dacrotized nut	C10 RUB003
8 Packing gland seal	PTFE RUB008
9 Washer	PTFE carbon filled 25 RUB008
10 Light blue dacrotized steel lockable handle	Fe50 RUB003

Dimensions

D	inch	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
DN	mm	8	10	15	20	25	32	40	50
I	mm	12	12	15.5	17	21			
L	mm	45	45	59	64	81			
G	mm	22.5	22.5	29.5	32	40.5			
A	mm	95.5	95.5	95.5	116	116			
H	mm	47	47	51.5	59	63			
CH	mm	20	20	25	31	40			
N					M5				

