




Carbon Steel Swing Disc Wafer Check Valve

16 – 25 BAR Rated

Suitable for installation between PN16 - PN10 - PN25 - ASA 150 flanges
Complies with 97/23/CE (PED) directive

Article no. Without Spring	Size	Pressure BAR	Price £	Price €	Article no. With Spring	Size	Pressure BAR	Price £	Price €
0643050	2"	25	£80.90	€85.00	M643050	2"	25	£98.70	€103.70
0643065	2 1/2"	25	£90.50	€95.00	M643065	2 1/2"	25	£111.10	€116.60
0643080	3"	25	£116.60	€122.40	M643080	3"	25	£141.30	€148.30
06430100	4"	25	£123.40	€129.60	M6430100	4"	25	£157.70	€165.60
06430125	5"	16	£164.60	€172.80	M6430125	5"	16	£205.70	€216.00
06430150	6"	16	£212.60	€223.20	M6430150	6"	16	£261.90	€275.00
06430200	8"	16	£356.60	€374.40	M6430200	8"	16	£422.40	€443.50
06430250	10"	16	£493.70	€518.40	M6430250	10"	16	£592.50	€622.10
06430300	12"	10	£788.60	€828.00					
06430350	14"	10	£1,056.00	€1,108.80					
06430400	16"	10	£1,714.30	€1,800.00					

Standard = with NBR Nitril O ring On request with Viton O rings

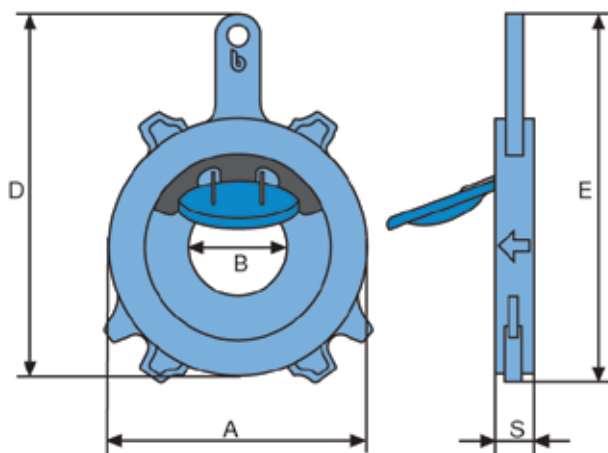

Dimensions (mm) & Weight (Kg)

DN	50	65	80	100	125	150	200	250
A	99	118	134	154	184	208	264	317
B	33.3	43	53	75	96	118	164	200
S	18.5	18.5	22	23.5	29	34.5	36	38
D	148	166	182	208	242	269	327	387
E	151	170	188	223	257	286	335	387
Kg	0.82	1.25	1.86	2.42	3.1	5.23	8.5	12.4

Opening pressure (mmH²O) in all positions (with spring)

DN	50	65	80	100	125	150	200	250
↓	60	60	45	40	30	30	30	30
↑	200	200	200	180	230	230	240	260
↔	130	130	120	110	130	130	140	140