




Carbon Steel Swing Disc Wafer Check Valve

16 – 25 BAR Rated

Suitable for installation between PN16 - PN10 - PN25 - ASA 150 flanges
Complies with 97/23/CE (PED) directive

Article no. Without Spring	Size	Pressure BAR	Price £	Price €	Article no. With Spring	Size	Pressure BAR	Price £	Price €
0643050	2"	25	£85.00	€87.60	M643050	2"	25	£103.70	€106.90
0643065	2 1/2"	25	£96.50	€99.50	M643065	2 1/2"	25	£118.10	€121.80
0643080	3"	25	£125.30	€129.20	M643080	3"	25	£151.20	€155.90
06430100	4"	25	£131.00	€135.10	M6430100	4"	25	£167.00	€172.30
06430125	5"	16	£187.20	€193.10	M6430125	5"	16	£230.40	€237.60
06430150	6"	16	£244.80	€252.50	M6430150	6"	16	£296.60	€305.90
06430200	8"	16	£396.00	€408.40	M6430200	8"	16	£465.10	€479.70
06430250	10"	16	£561.60	€579.20	M6430250	10"	16	£665.30	€686.10
06430300	12"	10	£878.40	€905.90					
06430350	14"	10	£1,152.00	€1,188.00					
06430400	16"	10	£1,872.00	€1,930.50					

Standard = with NBR Nitril O ring On request with Viton O rings

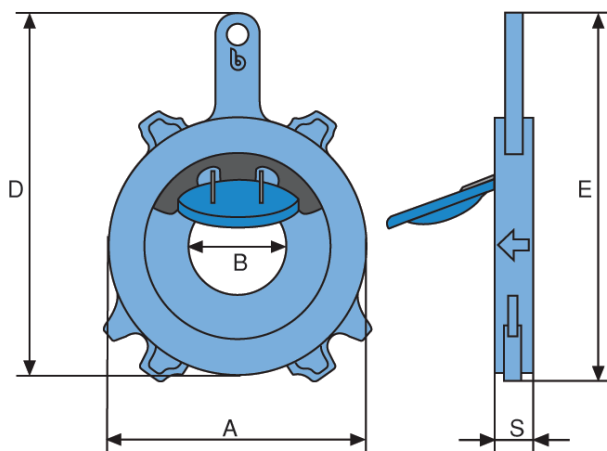

Dimensions (mm) & Weight (Kg)

DN	50	65	80	100	125	150	200	250
A	99	118	134	154	184	208	264	317
B	33.3	43	53	75	96	118	164	200
S	18.5	18.5	22	23.5	29	34.5	36	38
D	148	166	182	208	242	269	327	387
E	151	170	188	223	257	286	335	387
Kg	0.82	1.25	1.86	2.42	3.1	5.23	8.5	12.4

Opening pressure (mmH₂O) in all positions (with spring)

DN	50	65	80	100	125	150	200	250
↓	60	60	45	40	30	30	30	30
↑	200	200	200	180	230	230	240	260
↔	130	130	120	110	130	130	140	140